

超级工厂
Super Factory



设备齐全
Well Appointed



前端技术
Advance Techniques



售后保障
Guarantee After Sales

以人为本 品质第一 顾客至上
Putting People First, Quality First, and Customer First



PRODUCT CATALOG

产品选型手册

以人为本 品质第一 顾客至上

Putting People First, Quality First, and Customer First

CONTENTS
目录

洗衣机系列 ----- 05
Washing Machine Series

XTQ全自动洗脱机 ----- 05
XT fully automatic washing machine

GX 工业洗衣机 ----- 13
GX Industrial washing machine

SS75工业脱水机 ----- 15
ss75 industrial dewatering machine

GXF 工业染色机 ----- 17
GXF Dyeing machine

SXT 商用精洗机 ----- 11
SXT fully automatic washing machine

BW卫生隔离式洗脱机----- 23
BW isolated washing machine

TB 投币式洗衣机----- 25
TB coin - operated washing machine

干衣机系列 ----- 31
Dryer Series

SWA801 工业干衣机 ----- 31
SWA801 Industrial Dryer

干洗机系列 ----- 35
Dry cleaning machine series

P 全封闭四氯乙烯干洗机 ----- 35
P fully enclosed tetrachloroethylene dry cleaning machine

GXS 石油干洗机 ----- 37
GXS petroleum dry cleaning machine

多溶剂干洗机系列 ----- 39
Multi - solvent dry cleaning machine

后整理系列 ----- 41
Finishing equipment series

SK 送布机----- 41
SK fabric feeder

YPA 熨平机 ----- 43
YPA ironing machine

ZD 折叠机 ----- 45
ZD folding machine

辅助设备系列----- 47
Auxiliary equipment series

洗鞋机 ----- 43
Shoe washing machine

烘鞋机 ----- 45
Shoe drying machine

夹烫机 ----- 46
Ironing machine

自吸风烫台、发生器 ----- 46
Self - suction ironing table and generator

多功能烫台 ----- 47
Multi - functional ironing table

衣物包装机 ----- 51
Clothing packaging machine

衣物输送线 ----- 52
Clothing conveyor line

COMPANY EXHIBITION

展会



洗衣机系列 Washing Machine Series

01 15kg/20kg/25kg
15kg/20kg/25kg



产品特点 Product features

- ◎全悬浮式自动工业洗涤脱水机, 内胆和外缸接口采用对接方式, 可有效避免布草的意外损伤;
 - ◎采用 SUS304 不锈钢面板和内胆, 使用寿命更长, 更易清洗; 滚筒采用特殊的防腐处理, 经久耐用; 整个洗涤缸系统悬空安装在弹簧和减震装置上, 减震达 95%, 使用时无须固定机器;
 - ◎配有大的皂液盒容器, 既不会产生皂粉堆积现象;
 - ◎使用全电脑控制, 变频调速, 液晶屏幕显示一目了然; 具有故障和功能自检系统, 使其维修更容易;
 - ◎电器控制部件均采用优质元件, 采用优质特种电机和变频器。
- ◎ The fully suspended automatic industrial washing and dewatering machine adopts a docking method between the inner and outer cylinder interfaces, which can effectively avoid accidental damage to the linen;
 - ◎ Using SUS304 stainless steel panel and inner liner, with longer service life and easier cleaning; The hydraulic cylinder adopts special anti-corrosion treatment, which is durable and long-lasting; The entire washing cylinder system is suspended and installed on springs and shock absorbers, with a shock absorption of up to 95%, and there is no need to fix the machine during use;
 - ◎ Equipped with a large soap box container, it will not cause soap powder accumulation phenomenon;
 - ◎ Using full computer control, variable frequency speed regulation, and LCD screen display at a glance. Equipped with a fault and functional self inspection system, making maintenance easier;
 - ◎ Electrical control components are all made of high-quality components, using high-quality special motors and frequency converters.

产品参数 Product parameters

型号 Model number	XTQ-15	XTQ-20	XTQ-25
最佳洗涤容量 Optimal washing capacity(Kg)	12-13	17-18	22-23
滚筒直径 Drum diameter(mm)	730	730	800
滚筒深度 Drum depth(mm)	360	480	490
电机功率 Motor power(KW)	1.5	2.2	2.2
变频器功率 Inverter Power(KW)	2.2	2.2	3.7
洗涤速度 Washing speed(r/min)	37	37	37
高脱速度 High removal speed(r/min)	800	800	800
门直径 Door diameter(mm)	540	540	540
G 因子 g-factor	336	336	336
加热方式 Heating method	电加热 Electrical heating		
电加热功率 Electric heating power(KW)	6	6	9
排水口径 Drainage diameter(mm)	60	60	60
洗涤噪音 Washing noise(dB)	≤65	≤65	≤65
进水口径 Inlet diameter(mm)	25	25	25
每车耗水量 Water consumption per vehicle(Kg)	≤450	≤450	≤500
电源 Power Supply 【V/P/HZ】	380/220	380/220	380/220
外形尺寸 Net machine size(长*宽*高 L*W*H mm)	920*1030*1580	1100*1030*1580	1150*1030*1580
机器净重 Net weight of machine(kg)	660	700	730

产品应用 Product application

用于干洗店、美容院、理发店、工厂、学校、酒店、医院、部队、洗衣厂等行业清洁洗涤衣物、毛巾、被单、枕套等布草。

Used for cleaning and washing clothes, towels, sheets, pillowcases, and other fabrics in industries such as drycleaners, beauty salons, hair salons, factories, schools, hotels, hospitals, military units, and laundry factories.

主要配件 Main accessories



洗衣机系列 Washing Machine Series

02 30kg



产品特点 Product features

- ◎全悬浮式自动工业洗涤脱水机,内胆和外缸接口采用对接方式,可有效避免布草的意外损伤;
 - ◎采用 SUS304 不锈钢面板和内胆,使用寿命更长,更易清洗;液缸采用特殊的防腐处理,经久耐用;整个洗涤缸系统悬空安装在弹簧和减震装置上,减震达 95%,使用时无须固定机器;
 - ◎配有大的皂液盒容器,既不会产生皂粉堆积现象;
 - ◎使用全电脑控制,变频调速,液晶屏幕显示一目了然;具有故障和功能自检系统,使其维修更容易;
 - ◎电器控制部件均采用优质元件,采用优质特种电机和变频器。
- ◎ The fully suspended automatic industrial washing and dewatering machine adopts a docking method between the inner and outer cylinder interfaces, which can effectively avoid accidental damage to the linen;
 - ◎ Using SUS304 stainless steel panel and inner liner, with longer service life and easier cleaning; The hydraulic cylinder adopts special anti-corrosion treatment, which is durable and long-lasting; The entire washing cylinder system is suspended and installed on springs and shock absorbers, with a shock absorption of up to 95%, and there is no need to fix the machine during use;
 - ◎ Equipped with a large soap box container, it will not cause soap powder accumulation phenomenon;
 - ◎ Using full computer control, variable frequency speed regulation, and LCD screen display at a glance. Equipped with a fault and functional self inspection system, making maintenance easier;
 - ◎ Electrical control components are all made of high-quality components, using high-quality special motors and frequency converters.

产品参数 Product parameters

型号 Model number	XTQ-30	XTQ-40
最佳洗涤容量 Optimal washing capacity (Kg)	27-28	33-35
滚筒直径 Drum diameter (mm)	800	900
滚筒深度 Drum depth (mm)	580	580
电机功率 Motor power (KW)	3	4
变频器功率 Inverter Power (KW)	5.5	5.5
洗涤速度 Washing speed (r/min)	37	37
高脱速度 High removal speed (r/min)	800	750
G 因子 g - factor	312	313
门直径 Door diameter (mm)	540	540
加热方式 Heating method	电热/蒸汽 Electric heating/steam	
蒸汽耗量 Steam consumption (kg/H)	25	35
蒸汽管径 Steam pipe diameter (mm)	28	33
电加热功率 Electric heating power (kw)	15	18
排水口径 Drainage diameter (mm)	75	140
洗涤噪音 Washing noise (dB)	<75	<65
进水口径 Inlet diameter (mm)	32	55
压缩空气压力 Compressed air pressure (mpa)	0.4-0.6	0.4-0.6
每车耗水量 Water consumption per vehicle (Kg)	≤500	<550
电源 Power Supply [V/PH/Z]	380/220	380/3/50
机器外形尺寸 Machine dimensions (长*宽*高 L*W*H mm)	1260*1160*1680	1400*1320*1850
机器净重 Net weight of machine (kg)	860	1180
机器体积 Machine volume (m³)	2.5	3.5

产品应用 Product application

用于干洗店、美容院、理发店、工厂、学校、酒店、医院、部队、洗衣厂等行业清洁洗涤衣物、毛巾、被单、枕套等布草。

Used for cleaning and washing clothes, towels, sheets, pillowcases, and other fabrics in industries such as drycleaners, beauty salons, hair salons, factories, schools, hotels, hospitals, military units, and laundry factories.

主要配件 Main accessories



洗衣机系列 Washing Machine Series

03 50kg/70kg



产品特点 Product features

- ◎全悬浮式自动工业洗涤脱水机,内胆和外缸接口采用对接方式,可有效避免布草的意外损伤;
- ◎采用SUS304 不锈钢面板和内胆,使用寿命更长,更易清洗;液缸采用特殊的防腐处理,经久耐用;整个洗涤缸系统悬空安装在弹簧和减震装置上,减震达95%,使用时无须固定机器;
- ◎配有大的皂液盒容器,既不会产生皂粉堆积现象;
- ◎使用全电脑控制,变频调速,液晶屏幕显示一目了然;具有故障和功能自检系统,使其维修更容易;
- ◎电器控制部件均采用优质元件,采用优质特种电机和变频器。
- ◎加热方式可做:电加热,蒸汽加热可选其中一种。

- ◎ The fully suspended automatic industrial washing and dewatering machine adopts a docking method between the inner and outer cylinder interfaces, which can effectively avoid accidental damage to the linen;
- ◎ Using SUS304 stainless steel panel and inner liner, with longer service life and easier cleaning; The hydraulic cylinder adopts special anti-corrosion treatment, which is durable and long-lasting; The entire washing cylinder system is suspended and installed on springs and shock absorbers, with a shock absorption of up to 95%, and there is no need to fix the machine during use;
- ◎ Equipped with a large soap box container, it will not cause soap powder accumulation phenomenon;
- ◎ Using full computer control, variable frequency speed regulation, and LCD screen display at a glance. Equipped with a fault and functional self inspection system, making maintenance easier;
- ◎ Electrical control components are all made of high-quality components, using high-quality special motors and frequency converters.
- ◎ eating methods can be used: electric heating, steam heating can be selected either.

产品参数 Product parameters

型号 Model number	XTQ-50	XTQ-70
最佳洗涤容量 Optimal washing capacity (Kg)	40-45	60 - 65
滚筒直径 Drum diameter (mm)	980	1080
滚筒深度 Drum depth (mm)	680	830
电机功率 Motor power (KW)	5.5	5.5
变频器功率 Inverter Power (KW)	7.5	11
洗涤速度 Washing speed (r/min)	37	37
高脱速度 High removal speed (r/min)	700	700
G 因子 g - factor	380	450
门直径 Door diameter (mm)	740	740
加热方式 Heating method	电热/蒸汽Electric heating/steam	
蒸汽耗量 Steam consumption (kg/H)	45	70
蒸汽管径 Steam pipe diameter (mm)	DN25	DN25
电加热功率 Electric heating power (kw)	36	48
排水口径 Drainage diameter (mm)	89	114
洗涤噪音 Washing noise (dB)	≤65	≤65
进水口径 Inlet diameter (mm)	DN40	DN40
压缩空气压力 Compressed air pressure (mpa)	0.4-0.6	0.4 - 0.6
每车耗水量 Water consumption per vehicle (Kg)	≤900	≤1200
电源 Power Supply [V/PH/Z]	380/3/50	380/3/50
机器外形尺寸 Machine dimensions (长*宽*高 L*W*H mm)	1580*1750*1850	1680*1850*1920
机器净重 Net weight of machine (kg)	1950	2400
机器体积 Machine volume (m³)	5.2	5.9

产品应用 Product application

用于干洗店、美容院、理发店、工厂、学校、酒店、医院、部队、洗衣厂等行业清洁洗涤衣物、毛巾,被单、枕套等布草。

Used for cleaning and washing clothes, towels, sheets, pillowcases, and other fabrics in industries such as drycleaners, beauty salons, hair salons, factories, schools, hotels, hospitals, military units, and laundry factories.

洗衣机系列 Washing Machine Series

04 100kg/120kg*150kg



产品特点 Product features

- ◎全悬浮式自动工业洗涤脱水机,内胆和外缸接口采用对接方式,可有效避免布草的意外损伤;
- ◎采用SUS304 不锈钢面板和内胆,使用寿命更长,更易清洗;液缸采用特殊的防腐处理,经久耐用;整个洗涤缸系统悬空安装在弹簧和减震装置上,减震达95%,使用时无须固定机器;
- ◎配有大的皂液盒容器,既不会产生皂粉堆积现象;
- ◎使用全电脑控制,变频调速,液晶屏幕显示一目了然;具有故障和功能自检系统,使其维修更容易;
- ◎电器控制部件均采用优质元件,采用优质特种电机和变频器。
- ◎加热方式可做:电加热,蒸汽加热可选其中一种。
- ◎ The fully suspended automatic industrial washing and dewatering machine adopts a docking method between the inner and outer cylinder interfaces, which can effectively avoid accidental damage to the linen;
- ◎ Using SUS304 stainless steel panel and inner liner, with longer service life and easier cleaning; The hydraulic cylinder adopts special anti-corrosion treatment, which is durable and long-lasting; The entire washing cylinder system is suspended and installed on springs and shock absorbers, with a shock absorption of up to 95%, and there is no need to fix the machine during use;
- ◎ Equipped with a large soap box container, it will not cause soap powder accumulation phenomenon;
- ◎ Using full computer control, variable frequency speed regulation, and LCD screen display at a glance. Equipped with a fault and functional self inspection system, making maintenance easier;
- ◎ Electrical control components are all made of high-quality components, using high-quality special motors and frequency converters.
- ◎ eating methods can be used: electric heating, steam heating can be selected either.

产品参数 Product parameters

型号 Model number	XTQ-100	XTQ-120	XTQ-150
最佳洗涤容量 Optimal washing capacity (Kg)	85 - 90	105 - 110	130 - 140
滚筒直径 Drum diameter (mm)	1200	1300	1470
滚筒深度 Drum depth (mm)	850	850	850
电机功率 Motor power (KW)	7.5	11	18.5
变频器功率 Inverter Power (KW)	15	15	22
洗涤速度 Washing speed (r/min)	37	37	37
高脱速度 High removal speed (r/min)	650	650	650
门直径 Door diameter (mm)	860	860	860
加热方式 Heating method	电热/蒸汽 Electric heating/steam		
蒸汽耗量 Steam consumption (kg/H)	80	110	130
蒸汽管径 Steam pipe diameter (mm)	DN25	DN25	DN25
电加热功率 Electric heating power (kw)	48	60	60
排水口径 Drainage diameter (mm)	114	140	140
洗涤噪音 Washing noise (dB)	≤65	≤65	≤65
进水口径 Inlet diameter (mm)	DN40	DN40	DN50
压缩空气压力 Compressed air pressure (mpa)	0.4 - 0.6	0.4 - 0.6	0.4 - 0.6
每车耗水量 Water consumption per vehicle (Kg)	≤1500	≤1800	≤2150
电源 Power Supply [V/PH/Z]	380/350	380/350	380/3/50
机器外形尺寸 Machine dimensions (长*宽*高 L*W*H mm)	1780*1950*2030	1890*2080*2120	2050*2250*2300
机器净重 Net weight of machine (kg)	3000	3300	4000
机器体积 Machine volume (m³)	8.2	9	11
可倾斜角度 Tilt angle (度)	-	13	14

产品应用 Product application

用于干洗店、美容院、理发店、工厂、学校、酒店、医院、部队、洗衣厂等行业清洁洗涤衣物、毛巾、被单、枕套等布草。

Used for cleaning and washing clothes, towels, sheets, pillowcases, and other fabrics in industries such as drycleaners, beauty salons, hair salons, factories, schools, hotels, hospitals, military units, and laundry factories.



◆> GX洗衣机系列 GX industrial washing machine series



产品特点 Product features

- ◎ 采用卧式滚筒型, 内外筒均采用优质不锈钢板精制而成, 平整光亮、耐腐蚀, 对织物的磨损小且无损伤, 机器使用寿命长;

◎内筒门盖均装有不锈钢安全锁紧机构, 外筒门盖上设有电器互锁装置, 运转安全可靠;

◎采用三角胶带传动, 振动小、运转平稳、经久耐用。
- ◎ Adopting the horizontal cylinder type, the internal and external section are made of high quality stainless steel, level it bright, able to bear corroding, high wear resistance and not damage it, long performance life.

◎ There are incorporated lock on the inner door and electronic interlock on the shell door. It is safe and reliable in running.

◎ Be driven with belt, small vibration, turn round steady, durable.

产品参数 Product parameters

型号 Model number	GX-20	GX-30	GX-50	GX-70	GX-100
最大洗涤容量Maximum washing capacity (kg)	20	30	50	70	100
内胆尺寸Inner tank size (mm)	570×710	720×850	800×1000	900×1220	950×1550
内胆厚度Inner tank thickness (mm)	1.2	1.2	1.2	1.2	1.5
外壳厚度Outer shell thickness (mm)	1.2	1.2	1.2	1.2	1.5
内侧板Inner side plate (mm)	6	6	6	8	10
外侧板Outer side plate (mm)	6	6	6	8	8
电机功率Motor power (kw)	0.55	1.1	1.5	2.2	3
洗涤转速Washing speed (r/min)	40	38	38	38	38
外形尺寸Overall dimensions (mm)	1400×1000×1350	1600×1250×1450	1750×1300×1450	2000×1450×1650	2380×1280×1900
全钢内侧板All - steel inner side plate (mm)	4	5	5	4	5
全钢外侧板All - steel outer side plate (mm)	3	4	4	3	5

型号 Model number	GX-150	GX-200	GX-250	GX-300	GX-400	GX-500
最大洗涤容量Maximum washing capacity (kg)	150	200	250	300	400	500
内胆尺寸Inner tank size (mm)	1060×1600	1060×2000	1150×2200	1300×2300	1300×2800	1470×2830
内胆厚度Inner tank thickness (mm)	1.5	2	2	2.5	3	3
外壳厚度Outer shell thickness (mm)	1.5	2	2	2.5	2.5	3
内侧板Inner side plate (mm)	10	10	10	12	14	14
外侧板Outer side plate (mm)	10	10	10	12	12	14
电机功率Motor power (kw)	4	5.5	7.5	7.5	11	15
洗涤转速Washing speed (r/min)	38	38	38	32	28	28
外形尺寸Overall dimensions (mm)	2500×1400×1950	2900×1400×1950	3100×1850×2000	3300×2000×2200	3900×2000×2250	4000×2200×2500
全钢内侧板All - steel inner side plate (mm)	6	8	8	10	10	12
全钢外侧板All - steel outer side plate (mm)	5	6	6	8	10	10

SS75工业脱水机系列

SS75 industrial dewatering machine series



产品特点 Product features

- ◎独特的三足悬摆式结构,可避免因载重不平衡而产生的震动;
- ◎转胆采用不锈钢板精制而成,坚固耐用;
- ◎特有制动开合臂装置,制动性能良好,安全可靠;
- ◎采用三胶带传动,由电机带动起步轮,缓步启动至正常转速,运转平稳无振动。
- ◎ Independent three legs suspended instruction can avoid shock caused by unbalanced loaded.
- ◎ The roller is made of good quality stainless, strong and durable.
- ◎ Applied with brake system, safe and reliable performance.
- ◎ Adopt a sticky tape of trigonometry of transmission, it is driven the wheel by the electrical machinery to start. Walk unhurriedly and start to the normal rotational speed. Turning round with no vibration, but steadily.



产品特点 Product features

SS系列脱水机选用优质不锈钢材料制成,性能优良,运转平稳,脱水率高。其中SWE301系列大容量脱水机是引用西德技术、按国际标准制作而成,为国内首创,具有容量大,耗能小等特点。有完善的防震、定时、自动和安全控制系统。

SS Series dewatering machine is made of high quality stainless stell. Superior performance,smooth running.High dewatering rate. The SWE301 - 1500 large capacity hydro extractor adopts the west Germany technique and in accor - danle with national standard, which makes it pioneer in domestic. They have the characteristics of big capacity and low consumption etc. But having the perfect quakeproof, timing, auto controls the system with the safety.

产品参数 Product parameters

型号 Model number	SS752-500	SS752-600	SS753-800	SS751-1000	SS754-1200	SWE301-150
转鼓直径Drum diameter (mm)	500	600	800	1000	1200	1500
转鼓高度Drum height (mm)	300	300	340	380	480	600
主轴转速Spindle speed (r/min)	960	960	910	900	700	750
电机功率Motor power (kw)	1.5	2.2	4	5.5	7.5	11
最大容量Maximum capacity (kg)	25	50	80	130	220	500
外形尺寸Overall dimensions (mm)	1000×1000×650	1250×1250×700	1500×1500×800	1800×1800×900	1000×1000×650	1000×1000×650
整机重量Total weight (kg)	250	450	760	1100	1600	2400

染色机系列
Dyeing machine series



产品特点 Product features

- ◎适用于麻、棉、人造丝等；

◎采用全不锈钢制造, 机械调速具有无噪音、调速方便等优点；

◎桨叶正反方向搅拌染液, 使染物成浮染状态, 染色均匀、渗透力强, 不易损伤染物。
- ◎ Applicable to linen, cotton, rayon, etc.

◎ Adopts stainless steel manufacturing, mechanical control has advantages of anti-noise, and easy to adjust speed.

◎ Mixing blades and direction to make dye liquid, floating with state, dyeing uniformity, strong penetration without damage fabric to be dye.

产品参数 Product parameters

型号 Model number	GXF-20	GXF-30	GXF-50	GXF-70	GXF-100
最大洗涤容量Maximum washing capacity (kg)	20	30	50	70	100
内胆尺寸 Inner tank size (mm)	570×710	720×850	800×1000	900×1220	950×1550
内胆厚度 Inner tank thickness (mm)	1.2	1.2	1.2	1.2	1.5
外壳厚度 Outer shell thickness (mm)	1.2	1.2	1.2	1.2	1.5
全钢内侧板 Full-steel Inner side plate (mm)	4	5	5	5	5
全钢外侧板 Full-steelOuter side plate (mm)	3	4	4	5	5
电机功率 Motor power (kw)	0.55	1.1	1.5	2.2	3
洗涤转速Washing speed (r/min)	40	38	38	38	38
外形尺寸Overall dimensions (mm)	1400×1000×1350	1600×1250×1450	1750×1300×1450	2000×1450×1650	2380×1280×1900

型号 Model number	GXF-150	GXF-200	GXF-250	GXF-300	GXF-400	GXF-500
最大洗涤容量Maximum washing capacity (kg)	150	200	250	300	400	500
内胆尺寸 Inner tank size (mm)	1060×1600	1060×2000	1150×2200	1300×2300	1300×2800	1470×2830
内胆厚度 Inner tank thickness (mm)	1.5	2	2	2.5	3	3
外壳厚度 Outer shell thickness (mm)	1.5	2	2	2.5	2.5	3
全钢内侧板 Full-steel Inner side plate (mm)	6	8	8	10	10	12
全钢外侧板 Full-steelOuter side plate (mm)	5	6	6	8	10	10
电机功率 Motor power (kw)	4	5.5	7.5	7.5	11	15
洗涤转速Washing speed (r/min)	38	38	38	32	28	28
外形尺寸Overall dimensions (mm)	2500×1400×1950	2900×1400×1950	3100×1850×2000	3300×2000×2200	3900×2000×2250	4000×2200×2500

商用全自动洗衣机系列

Commercial fully automatic washing machine Series



- 产品特点 Product features
- ◎ 采用触摸式电脑操作面板,能独立完成加水、加热、洗涤、加剂、匀布、脱水等功能。

◎ 设备完全无需打地脚螺钉,适用于任何楼层。

◎ 采用全变频无级调速控制,可满足转速的快速线性攀升和转换要求。

◎ 设计先进独特的电脑加剂系统,所有辅料实行一次加剂,每液可以装3种以上。

◎ 主轴、轴封均采用进口知名品牌,门密封采用耐温、耐腐蚀氟橡胶密封圈。

◎ 不锈钢结构更适应现代洗衣房的环境要求,内转笼、法兰轴均由优质优质不锈钢制成。

◎ 内外笼均采用耐腐蚀板经先进的工艺加工孔直径为2.5mm减轻对衣物的损伤,同时提高衣物的洁净度。

◎ 变频器、控制系统电器元件采用国内及国外知名品牌,部分控制阀门为进口,排水阀专业定制为大的排水直径为75mm。

◎ automatic fine washing machine using touch computer operating panel, can independently complete the water, heating, washing, adding agent, uniform cloth, dehydrating and other functions. The equipment does not need to play the anchor screw, suitable for any floor.

◎ The use of full frequency stepless speed control, can meet the speed of rapid linear climb and conversion requirements.

◎ The design of advanced unique computer dosing system, all the auxiliary materials for one dosing, soap liquid can be loaded with more than 3 kinds.

◎ The main shaft, shaft seal are imported well - known brands, the door seal using temperature resistance, corrosion resistance fluorine rubber sealing ring.

◎ Stainless steel structure is more suitable for the environmental requirements of modern laundry rooms, and the inner rotating cage and flange shaft are made of corrosion - resistant high - quality stainless steel.

◎ Inside and outside the cage are made of high - quality steel plate through advanced technology processing hole diameter of 2.5mm to reduce the damage to the clothing, while improving the cleanliness of the clothing.

◎ Inverter, control system electrical components using domestic and foreign well - known brands, some control valves are imported, drainage valves are professionally customized for large drainage diameter of 75mm.

产品参数 Product parameters

型号 Model number	SXT-20A	SXT-25A	SXT-30A
最佳洗涤容量 Optimal washing capacity (Kg)	20	25	30
滚筒尺寸 Drum mesh (mm)	730×475	800×490	800×580
洗涤转速 Washing speed (r/min)	37	37	37
高脱速度 High removal speed (r/min)	900	900	900
电机功率 Motor power (kw)	2.2	2.2	3
变频器功率 Inverter power (kw)	2.2	3.7	5.5
电加热功率 Electric heating power (kw)	6	9	12
门直径 Door diameter (mm)	550	550	550
排水阀口径 Drain valve diameter (mm)	75	75	75
进水阀口径 Inlet valve diameter (mm)	25	25	32
外形尺寸 Net machine size (长*宽*高 L*W*H mm)	1080×1020×1580	1080×1080×1580	1080×1180×1600
机器净重 Net weight of machine (kg)	620	660	760



商用全自动洗衣机系列

Commercial fully automatic washing machine Series



产品特点 Product features

- 采用触摸式电脑操作面板,能独立完成加水、加热、洗涤、加剂、匀布、脱干等功能。
- 设备完全无需打地脚螺钉,适用于任何楼层。
- 采用全变频无级调速控制,可满足转速的快速线性攀升和转换要求。
- 设计先进独特的电脑加剂系统,所有辅料实行一次加剂,每液可以装3种以上。
- 主轴、轴封均采用进口知名品牌,门密封采用耐温、耐腐蚀氟橡胶密封圈。
- 不锈钢结构更适应现代洗衣房的环境要求,内转笼、法兰轴均由优质优质不锈钢制成。
- 内外笼均采用耐腐蚀板经先进的工艺加工孔直径为2.5mm减轻对衣物的损伤,同时提高衣物的洁净度。
- 变频器、控制系统电器元件采用国内及国外知名品牌,部分控制阀门为进口,排水阀专业定制为大的排水直径为75mm。
- automatic fine washing machine using touch computer operating panel, can independently complete the water, heating, washing, adding agent, uniform cloth, dehydrating and other functions. The equipment does not need to play the anchor screw, suitable for any floor.
- The use of full frequency stepless speed control, can meet the speed of rapid linear climb and conversion requirements.
- The design of advanced unique computer dosing system, all the auxiliary materials for one dosing, soap liquid can be loaded with more than 3 kinds.
- The main shaft, shaft seal are imported well - known brands, the door seal using temperature resistance, corrosion resistance fluorine rubber sealing ring.
- Stainless steel structure is more suitable for the environmental requirements of modern laundry rooms, and the inner rotating cage and flange shaft are made of corrosion - resistant high - quality stainless steel.
- Inside and outside the cage are made of high - quality steel plate through advanced technology processing hole diameter of 2.5mm to reduce the damage to the clothing, while improving the cleanliness of the clothing.
- Inverter, control system electrical components using domestic and foreign well - known brands, some control valves are imported, drainage valves are professionally customized for large drainage diameter of 75mm.

产品参数 Product parameters

型号 Model number	SXT-20B	SXT-25B	SXT-30B
最佳洗涤容量 Optimal washing capacity (Kg)	20	25	30
滚筒尺寸 Drum mesh (mm)	730×475	800×490	800×580
洗涤转速 Washing speed (r/min)	37	37	37
高脱速度 High removal speed (r/min)	950	900	900
门锁 Door lock	电子智能门锁 Electroniclock aluminum door		
电机功率 Motor power (kw)	2.2	2.2	3
变频器功率 Inverter power (kw)	2.2	3.7	5.5
电加热功率 Electric heating power (kw)	6	9	12
门直径 Door diameter (mm)	550	550	550
排水阀口径 Drain valve diameter (mm)	75	75	75
进水阀口径 Inlet valve diameter (mm)	25	25	32
外形尺寸 Net machine size (长*宽*高 L*W*H mm)	1080×1020×1580	1080×1080×1580	1080×1180×1600
机器净重 Net weight of machine (kg)	620	660	760



主要配件 Main accessories



隔离式洗衣机系列

Sanitary isolation washing and stripping machine Series



产品特点 Product features

- ◎内筒门安全方便。内胆、外壳均采用优质304不锈钢材质,具有强耐腐蚀性。
- ◎自动对门装置:对门采用接近开关自动控制,确保在装衣和取衣时,内门能精确定位。
- ◎安全门锁上锁和开锁,确保操作安全。
- ◎阻尼避震,特殊高强度设计,降低噪音,震动小,无论放多少布草,保障机器运行平稳。
- ◎电脑控制器:大屏幕液晶触摸屏电脑采用中(英)文操作界面,可进行操作和监控,更方便、更可靠。人机对话方式方便可靠。
- ◎ The inner cylinder door is safe and convenient. The inner liner and outer shell are made of high - quality 304 stainless steel material, which has strong corrosion resistance.
- ◎ Automatic door alignment device: The door is automatically controlled by a proximity switch to ensure precise positioning of the inner door during clothing loading and retrieval.
- ◎ Lock and unlock the safety door lock to ensure safe operation.
- ◎ Damping and shock - absorbing, with a special high - strength design, reduces noise and minimizes vibration. No matter how much cloth is placed, it ensures the smooth operation of the machine.
- ◎ Computer controller: The large LCD touch screen computer adopts a Chinese (English) operating interface, which can be operated and monitored, making it more convenient and reliable. The human - machine dialogue method is convenient and reliable.


产品参数 Product parameters

型号 Model number	BW-30	BW-50	BW-100
额度容量(干负载物) Quota capacity (dry load) (Kg)	30	50	100
内胆D×L(内尺寸) Inner liner D×L (inner size) (mm)	800×600	980×675	1200×900
电机功率 Motor power (Kw)	4	5.5	7.5
洗衣转速 Laundry speed (rpm)	35	35	32
均布转速 Uniform distribution speed (rpm)	70	70	65
中速脱水转速 Medium dehydration speed (rpm)	400	370	350
高速脱水转速 High speed dehydration speed (rpm)	800	750	750
蒸汽管道通径 Steam pipe diameter (mm)	Φ25(DN20)	Φ25(DN20)	Φ32(DN25)
冷热水管通径 Cold and hot water pipe diameter (mm)	Φ50(DN40)	Φ50(DN40)	Φ50(DN40)
排水管外径 Outer diameter of drainpipe (mm)	Φ89	Φ89	Φ114
进水压力 Inlet pressure (Mpa)	0.2 - 0.3	0.2 - 0.3	0.2 - 0.3
蒸汽压力 Steam pressure (Mpa)	0.4 - 0.6	0.4 - 0.6	0.4 - 0.6
压缩空气压力 Compressed air pressure (Mpa)	0.4 - 0.56	0.4 - 0.5	0.4 - 0.5
每车耗水量 Water consumption per vehicle (Kg)	450	700	1650
每车耗气量 Gas consumption per vehicle (Kg)	25	45	50
电加热功率 Electric heating power (Kw)	24	36	48
外形尺寸(前后) Overall dimensions (front and rear) (mm)	1380	1600	1860
外形尺寸(左右) Overall dimensions (around) (mm)	1440	1600	1860
外形尺寸(高度) Overall dimension (height) (mm)	1800	1900	2150
整机重量约 The weight of the machine is about (Kg)	1140	2000	3000
电源 Power supply (V/PH/HZ)	380/3/50	380/3/50	380/3/50

产品应用 Product application

用于干洗店、美容院、理发店、工厂、学校、酒店、医院、部队、洗衣厂等行业清洁洗涤衣物、毛巾,被单、枕套等布草。

Used for cleaning and washing clothes, towels, sheets, pillowcases, and other fabrics in industries such as drycleaners, beauty salons, hair salons, factories, schools, hotels, hospitals, military units, and laundry factories.

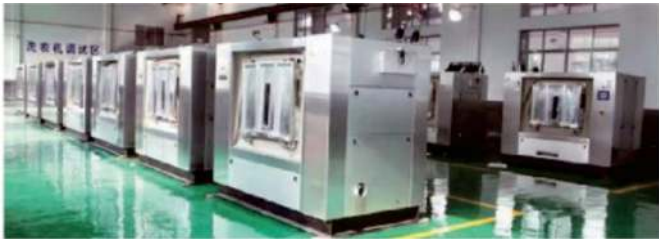

投币式洗衣机系列

Coin-operated washing machine Series

01 投币洗衣机

Coin-operated washing machine



- 产品特点 Product features
- ◎整机304不锈钢数控冲压经久耐用，防腐防锈。

◎数控化制造，紧凑而稳定，永久固定无震动。

◎双层烘干机具备自动监测故障功能，无需人共排查故障，更便于商家了解机器的使用情况和维护。

◎双层烘干一体机占地面积小，使用与学校、公寓、酒店，装有2套自助投币烘干智能系统，同时可以定做二维码收费系统和充值刷卡消费系统，更给商家和消费人群带来了利润和方便。

◎ The whole machine is made of 304 stainless steel with CNC stamping, which is durable and corrosion-resistant.

◎ CNC manufacturing, compact and stable, permanently fixed without vibration.

◎ The double-layer dryer has an automatic fault monitoring function, which eliminates the need for human troubleshooting and makes it easier for businesses to understand the use and maintenance of the machine.

◎ The double-layer drying integrated machine has a small footprint and can be used in schools, apartments, and hotels. It is equipped with two sets of self-service coin drying intelligent systems, and can also customize a QR code charging system and a recharge card consumption system, bringing profits and convenience to businesses and consumers.

产品参数 Product parameters

型号 Model number	TBX-12	TBX-15	TBX-20	TBX-25	TBX-30
机器容量 Capacity (kg)	12kg	15kg	20kg	25kg	30kg
滚筒尺寸 Roller size (mm)	730×300	730×360	730×475	800×490	800×580
电机功率 Motor power (kw)	1.5	1.5	2.2	2.2	3
变频器功率 Inverter Power (kw)	2.2	2.2	2.2	3.7	5.5
加热功率 Heating power (kw)	6	6	7.5	0	0
电源电压 Power supply voltage	220/380	220/380	220/380	220/380	220/380
进水阀 Inlet water port (mm)	20	20	20	20	20
排水阀 Drainage outlet (mm)	45	45	75	75	75
机器尺寸 Machine size (mm)	920×900×1330	920×900×1330	920×1000×1330	960×1000×1380	960×1100×1380
整机重量 Machine weight	420	420	430	450	480



- 产品应用 Product application
- 投币式洗衣烘干机用于家用、干洗店、学校、酒店、洗衣房、旅行社等行业便于对衣物、毛巾，被单、枕套等布草的烘干洗涤。

Coin operated washing and drying machines are used in industries such as homes, dry cleaners, schools, hotels, laundryrooms, travel agencies, etc., to facilitate the drying and washing of clothing, towels, sheets, pillowcases, and other fabrics.

投币式洗衣机系列

Coin-operated washing machine Series

02 投币式双层烘干机

Stacked coin-operated dryer



产品特点 Product features

- ◎投币式双层烘干一体机采用微电脑自动控制,中英文液晶显示,可储存多种程序可设置烘干时间、烘干温度、冷却时间,适用不同衣物的烘干;内胆采用优质不锈钢制作,能够降低衣物的磨损,延长使用寿命;
- ◎投币式双层烘干一体机运行平稳,噪声低,安装方便,操作使用简单,加热效率高。升温快,大开门大视镜,取衣方便迅捷。
- ◎数控化制造,紧凑而稳定,永久固定无震动。
- ◎投币式双层烘干一体机具备自动监测故障功能,无需人共排查故障,更便于商家了解机器的使用情况和维护。
- ◎投币式双层烘干一体机占地面积小,使用与学校、公寓、酒店,装有3套自助投币烘干智能系统,同时可以定做二维码收费系统和充值刷卡消费系统,更给商家和消费人群带来了利润和方便。

- ◎ The coin operated double-layer drying integrated machine adopts microcomputer automatic control, Chinese and English LCD display, can store multiple programs, and can set drying time, drying temperature, and cooling time, suitable for drying different clothes; The inner liner is made of high-quality stainless steel, which can reduce clothing wear and prolong its service life;
- ◎ The coin operated double-layer drying integrated machine runs smoothly, has low noise, is easy to install, is easy to operate and use, and has high heating efficiency. Fast heating, large door and mirror, convenient and fast clothing retrieval.
- ◎ CNC manufacturing, compact and stable, permanently fixed without vibration.
- ◎ The coin operated double-layer drying all-in-one machine has an automatic monitoring function for faults, eliminating the need for human troubleshooting, making it easier for businesses to understand the use and maintenance of the machine.
- ◎ The coin operated double-layer drying all-in-one machine takes up a small area and can be used in schools, apartments, and hotels. It is equipped with three sets of self-service coin operated drying intelligent systems, and can also customize a QR code charging system and a recharge card consumption system, bringing profits and convenience to businesses and consumers.

产品参数 Product parameters

型号 Model number	GQ-12Z	GQ-15Z
电机功率 Motor power (kw)	0.12*2	0.14*2
风机功率 Fan power (kw)	0.55*2	0.55*2
加热功率 Heating power (kw)	8/12	8/12
燃气加热流量 Gas heating flow(p)	3000-5000P	3000-5000P
燃气进口 Gas inlet (mm)	10	10
排风口径 exhaust air diameter is (mm)	105	105
滚筒尺寸 Drum size (mm)	750*480	750*600
外形尺寸 Machine size (mm)	930*880*2050	930*960*2050



产品应用 Product application

投币式洗衣烘干机用于家用、干洗店、学校、酒店、洗衣房、旅行社等行业便于对衣物、毛巾、被单、枕套等布草的烘干洗涤。

Coin operated washing and drying machines are used in industries such as homes, dry cleaners, schools, hotels, laundryrooms, travel agencies, etc., to facilitate the drying and washing of clothing, towels, sheets, pillowcases, and other fabrics.

投币式洗衣机系列 Coin-operated washing machine Series

03 投币式洗衣烘干机一体机

Stacked coin-operated washer-dryer



产品特点 Product features

- ◎投币式洗衣烘干机整机外壳转笼采用304 不锈钢材质, 经数控冲压经久耐用, 防腐防锈。
- ◎投币式洗衣烘干机数控化制造, 紧凑而稳定, 永久固定无震动。
- ◎电器控制部分配件采用国内、外品牌配件。
- ◎投币式洗衣烘干机具备自动监测故障功能, 无需人工排查故障, 更便于商家了解机器的使用情况和维护。
- ◎收费系统可以定做二维码收费系统、投币收费系统、充值卡收费系统。
- ◎投币式洗衣烘干机占地面积小, 使用于学校、公寓、酒店, 装有3套自助投币烘干智系统, 同时可以定做二维码收费系统和充值刷卡消费系统, 更给商家和消费人群带来了利润和方便。
- ◎ The shell and cage of the coin operated washing and drying machine are made of 304 stainless steel material, which is CNC stamped and durable, anti-corrosion and rust proof.
- ◎ The coin operated washing and drying machine is CNC manufactured, compact and stable, permanently fixed without vibration.
- ◎ The electrical control components adopt domestic and foreign brand accessories.
- ◎ The coin operated washing and drying machine has an automatic fault monitoring function, which eliminates the need for human troubleshooting and makes it easier for businesses to understand the use and maintenance of the machine.
- ◎ The charging system can be customized with QR code charging system, coin charging system, and recharge card charging system.
- ◎ The coin operated washing and drying machine has a small footprint and can be used in schools, apartments, and hotels. It is equipped with three sets of self-service coin operated drying intelligent systems, and can also customize a QR code charging system and a recharge card consumption system, bringing profits and convenience to businesses and consumers.

产品参数 Product parameters

型号 Model number	SXTH-12	SXTH-15	SXTH-20
洗涤容量Washing capacity (kg)	12	15	20
烘干容量Nominal capacity (kg)	12	15	20
洗涤速度Washing speed (r/min)	37	37	37
洗涤滚筒尺寸Wash Rolle size (mm)	730X290	730X360	730X475
烘干滚筒尺寸Dryer Rolle Size (mm)	780X460	780X550	780X650
最高脱水速度High speed (r/min)	800	780	780
电机功率The motor power(kw)	1.5	1.5	1.5
洗涤加热功率Washing electric heating power (kw)	6	6	7.5
电源电压The power supply voltage(v)	220/380/415	220/380/415	220/380/415
变频器功率Frequency converter power (kw)	2.2	2.2	2.2
排水阀尺寸Drain valve diameter (mm)	45	45	75
进水阀Inlet diameter (mm)	6分	6分	6分
烘干时间Drying time(min)	40 - 60	40 - 60	40 - 60
烘干加热功率Dryer electric heating power (kw)	12	12	15
电机功率The motor power (kw)	0.12	0.12	0.12
风机功率The fan power (kw)	0.37	0.37	0.55
排风口尺寸Exhaust vent dimensions (mm)	158	158	158
机器外形尺寸 External dimension H*D*W (mm)	2080×930×880	2080×930×960	2220×980×1000
机器重量Machine weight (kg)	450	480	530

产品应用 Product application

投币式洗衣烘干机用于家用、干洗店、学校、酒店、洗衣房、旅行社等行业便于对衣物、毛巾、被单、枕套等布草的烘干洗涤。

Coin operated washing and drying machines are used in industries such as homes, dry cleaners, schools, hotels, laundry rooms, travel agencies, etc., to facilitate the drying and washing of clothing, towels, sheets, pillowcases, and other fabrics.

◆> 干衣机系列

Dryer Series

01

15kg/20kg/25kg/30kg

15kg/20kg/25kg/30kg



产品特点

Product features

- ◎采用微电脑自动控制,中英文液晶显示,可储存多种程序可设置烘干时间、烘干温度、冷却时间,适用不同衣物的烘干;

◎内胆采用 SUS304 不锈钢制作,能够降低衣物的磨损,延长使用寿命;

◎机器运行平稳,噪音低,安装方便,操作使用简单,加热效率高。升温快,大开门大视镜,取衣方便迅捷;

◎数控化制造,紧凑而稳定,永久固定无震动;

◎工业烘干机具备自动监测故障功能,无需人共排查故障,更便于商家了解机器的使用情况和维护;

◎加热方式可以做电加热,蒸汽加热,燃气加热选其中一种。
- ◎ Equipped with microcomputer automatic control and LCD display inboth Chinese and English, it can store multiple programs and set dryingtime, drying temperature, and cooling time, suitable for drying differentclothes;

◎ The inner liner is made of SUS304 stainless steel, which can reducedclothing wear and prolong its service life;

◎ The machine runs smoothly, has low noise, is easy to install, is easyto operate and use, and has high heating efficiency. Fast heating, largedoor and mirror, convenient and fast clothing retrieval;

◎ CNC manufacturing, compact and stable, permanently fixed withoutvibration;

◎ The industrial dryer has an automatic fault monitoring function, whicheliminates the need for manual troubleshooting, making it easierforbusinesses to understand the usage and maintenance of the machine;

◎ Heating methods include electric heating, steam heating, or gasheating. Choose one of them.

产品参数

Product parameters

型号 Model number	SWA801-15	SWA801-20	SWA801-25	SWA801-30
最佳烘干容量 Optimum drying capacity (Kg)	11 - 12	17 - 18	22 - 23	27 - 28
滚筒直径 Drum diameter (mm)	860	860	970	970
滚筒深度 Drum depth (mm)	550	600	650	800
风机功率 Fan Power (KW)	0.5	0.55	0.75	0.75
电机功率 Motor power (KW)	0.2	0.2	0.2	0.4
每小时排风量 Exhaust air volume per hour (m³)	1500	2000	2500	3000
电加热功率 Electric heating power (KW)	7.5	15	21	27
烘干噪音 Drying noise (dB)	≤65	≤65	≤65	≤65
排风口直径 Vent diameter (mm)	170	170	200	200
门直径 Door diameter (mm)	74	74	74	74
每小时消耗液化气量 Liquefied gas consumption per hour (h/kg)	1	1.1	1.1	1.5
电源 Power Supply [V/P/HZ]	220/380	220/380	220/380	380/415
外形尺寸 Net machine size (长*宽*高 L*W*H mm)	1010×1030×1650	1010×1130×1630	1130×1220×1900	1130×1350×1900
机器净重 Net weight of machine (kg)	280	300	380	480



加热方式

Heating method



干衣机系列 Dryer Series

02 50kg/100kg/120kg
50kg/100kg/120kg



燃气加热
Gas heating



蒸汽加热
Steam heating



电加热
Electric heating



产品特点 Product features

- ◎采用微电脑自动控制，中英文液晶显示，可储存多种程序可设置烘干时间、烘干温度、冷却时间，适用不同衣物的烘干；
- ◎内胆采用 SUS304 不锈钢制作，能够降低衣物的磨损，延长使用寿命；
- ◎机器运行平稳，噪音低，安装方便，操作使用简单，加热效率高。升温快，大开门大视镜，取衣方便迅捷；
- ◎数控化制造，紧凑而稳定，永久固定无震动；
- ◎工业烘干机具备自动监测故障功能，无需人共排查故障，更便于商家了解机器的使用情况和维护；
- ◎加热方式可以做电加热，蒸汽加热，燃气加热选其中一种。
- ◎ Equipped with microcomputer automatic control and LCD display in both Chinese and English, it can store multiple programs and set drying time, drying temperature, and cooling time, suitable for drying different clothes;
- ◎ The inner liner is made of SUS304 stainless steel, which can reduce clothing wear and prolong its service life;
- ◎ The machine runs smoothly, has low noise, is easy to install, is easy to operate and use, and has high heating efficiency. Fast heating, large door and mirror, convenient and fast clothing retrieval;
- ◎ CNC manufacturing, compact and stable, permanently fixed without vibration;
- ◎ The industrial dryer has an automatic fault monitoring function, which eliminates the need for manual troubleshooting, making it easier for businesses to understand the usage and maintenance of the machine;
- ◎ Heating methods include electric heating, steam heating, or gas heating. Choose one of them.

产品参数 Product parameters

型号 Model number	SWA801-50	SWA801-70	SWA801-100	SWA801-120	SWA801-150
最佳烘干容量 Optimum drying capacity (Kg)	44 - 46	60 - 62	88 - 90	108 - 110	120 - 130
滚筒直径 Drum diameter (mm)	1140	1320	1320	1450	1600
滚筒深度 Drum depth (mm)	900	900	1100	1100	1190
风机功率 Fan Power (KW)	1.1	1.1	1.5	1.1*2	1.5*2
电机功率 Motor power (KW)	1.5	1.5	2.2	3	4
电加热功率 Electric heating power (KW)	36	42	54	60	
烘干噪音 Drying noise (dB)	≤65	≤65	≤65	≤65	≤65
排风口直径 Vent diameter (mm)	200X200	200X200	200X200	200X300	200X300
门直径 Door diameter (mm)	80	80	90	115	115
电源 Power Supply [V/P/HZ]	380/5/50	380/5/50	380/5/50	380/5/50	380/5/50
外形尺寸 Net machine size (长*宽*高 L*W*H mm)	1230×1660×2150	1480×1700×2300	1480×1900×2300	1620×1920×2450	1760×2200×2500
机器净重 Net weight of machine (kg)	580	680	980	1280	1400



◆>四氯乙烯干洗机系列

Tetrachloroethylene dry cleaning machine Series



产品特点 Product features

- ◎ 采用进口制冷回收系统,并配备制冷机循环和水冷却两种制冷回收系统回收溶剂,不锈钢无缝管路保;

◎ 该机配备了环保尼龙过滤器,一个活性炭过滤器,多重过滤既保持了溶剂的清洁度,从而有效地提高了织物的洗净度。双重过滤,降低蒸馏频率,蒸馏能耗低;

◎ 全电脑操作系统,预置 10 套程序,同时还可自行编程,能精确控制洗涤、烘干、洗液还原、衣物柔软及纤维复原整个干洗程序,也使操作大为简便全电脑自动监察系统能力及时指示洗衣机的运行故障,使得运行更安全维修时故障诊断更明确,简化了维修程序,缩短了维修时间。
- ◎ Adopting an imported refrigeration and recovery system,equipped with two refrigeration and recovery systems:refrigeration machine circulation and water cooling, to recoversolvents, and stainless steel seamless pipeline protection;

◎ This model is equipped with an environmentally friendlynylon filter and an activated carbon filter, which maintains thecleanliness of the solvent through multiple filters, effectivelyimproving the cleanliness of the fabric. Dual filtrationreduces distillation frequency and reduces distillation energyconsumption;

◎ A fully computerized operating system with 10 presetprograms and self programming capabilities, which canaccurately control the entire dry cleaning process of washing,drying, detergent reduction, clothing softness, and fiberrecovery. This greatly simplifies the operation and enables theautomatic monitoring system to promptly indicate the operationfaults of the washing machine, making it safer to operate. Thefault diagnosis during maintenance is more clear, simplifyingthe maintenance process and shortening the maintenancetime.

产品参数 Product parameters

型号 Model number	P-410	P-412	P-414	P-416	P-420
加热方式 Heating method	电热/蒸汽Electric heating/steam				
额定容量 Rated capacity (kg)	10	12	14	15	20
滚筒直径 Drum diameter (mm)	750×405	750×485	820×485	900×485	970×580
工作箱1/2/3容积 Working box 1/2/3 Volume (L)	178	212	256	308	428
门直径 Door diameter (mm)	41	41	41	41	41
洗涤转速 Washing speed (r/min)	34r/min (可调 tunable)				
甩干转速 Drying speed (r/min)	500r/min (可调 tunable)				
蒸馏速度 Distillation speed (r/min)	60 - 90	60 - 90	60 - 90	60 - 90	60 - 90
洗涤电机功率 Washing motor Power (kw)	1.5	2.2	2.2	3	4
液泵功率 Liquid pump Power (kw)	0.55	0.55	0.75	0.75	0.75
风机功率 Fan Power (kw)	0.55	0.55	0.75	0.75	0.75
过滤器电机功率 Filter Motor Power (kw)	0.37	0.37	0.55	0.55	0.55
压缩机功率 Compressor Power (kw)	1.1	1.1	1.5	1.5	2.2
蒸馏和加热方式 Distillation and heating methods	蒸汽 steam	蒸汽 steam	蒸汽 steam	蒸汽 steam	蒸汽 steam
电源 [V] Power Supply	380/415	380/415	380/415	380/415	380/415
机器外形尺寸 Machine dimensions (W*D*H) mm	1650×1200×2080	1650×1230×2080	1750×1230×2160	1800×1380×2280	1880×1560×2380
整机重量 Machine weight (kg)	860	980	1080	1280	1480



主要配件 Main accessories



石油干洗机系列

Petroleum dry cleaning machine Series



产品特点 Product features

- ◎配有全自动电脑控制器,可选择自动或手动操作,并
有多种洗涤方式。
- ◎采用悬架式阻尼结构,振动幅值小,可变频调速,运行
平稳。
- ◎配有双液盒和双滤芯,一机多用,外形美观,操作方
便。
- ◎ Equipped with a fully automatic computer controller, it can be
operated automatically or manually, and there are multiple washing
methods available.
- ◎ Adopting a suspension type damping structure, with small vibration
amplitude, variable frequency speed regulation, and smooth
operation.
- ◎ Equipped with dual liquid boxes and dual filter elements, it is
versatile and has a beautiful appearance, making it easy to operate.



产品参数 Product parameters

型号 Model number	GXS-8	GXS-10
额定容量 Rated capacity (kg)	8	8
鼓体积 Drum volume (Lt)	92	92
洗涤转速 Washing rotation (r/min)	40	40
快纺 Fast spinning (r/min)	800	800
电机功率 Motor power (kw)	1.5	1.5
液泵额定功率 Liquid pump power rating (kw)	2×0.37	2×0.37
电源 Power supply (v)	220	220
机器外形尺寸 External dimension (H*D*Wmm)	1710×900×1500	1710×900×1500
木箱外形尺寸 Dimensions of wooden case (H*D*Wmm)	1710×900×1500	1710×900×1500
机器重量 Machine weight (kg)	470	470
机器体积 Machine volume cubic meter (m³)	2.3	2.3



多溶剂干洗机系列

Multi solvent dry cleaning machine series



产品特点 Product features

- ◎本机采用悬浮式变频无极调速结构,比常规设备甩干转速高达2倍,转速可达1000转。烘干回收快,节省时间,节省能源30%。采用德国SUSPA原装进口减震器与合理的悬挂结构,设备高速运行更加稳定。设备无需固定,解决了常规设备在有地暖、地下车库(室)以及高楼层安装还需基础固定的烦恼。
- ◎本机采用冷风式烘干降温结构,无需用水,比常规设备节省30%的用水。而且该降温方式是目前国际节能减排的一种方式。
- ◎内转笼、外转笼、风道、油箱、液水分离器、过滤器等关键部件,全部采用优质不锈钢加环保循环多溶剂干洗机。
- ◎ This machine adopts a suspended variable frequency infinitespeed regulation structure, which has a spin drying speed upto twice that of conventional equipment, and a speed of up to1000 revolutions per minute. Fast drying and recycling, savingtime and energy by 30%. Adopting German SUSPA importedshock absorbers and a reasonable suspension structure,the equipment operates more stably at high speeds. Theequipment does not need to be fixed, solving the problem ofconventional equipment requiring foundation fixation wheninstalled in underfloor heating, underground garages (rooms),and high-rise buildings.
- ◎ This machine adopts a cold air drying and coolingstructure, which does not require water and saves 30% ofwater compared to conventional equipment. And this coolingmethod is currently one of the international energy-saving andemission reduction methods.
- ◎ Key components such as inner and outer rotating cages, airducts, oil tanks, liquid water separators, filters, etc. are all madeof high-quality stainless steel and environmentally friendlycirculating multi solvent dry cleaning machines.

产品参数 Product parameters

型号 Model number	
设备溶剂 Equipment solvent	HYDROCARBON
洗涤容量 Washing capacity (kg)	10
洗涤容量 diameter (mm)	520
深度 profundity (mm)	370
洗涤速度 Washing speed (RPM)	50
甩干速度 Drying rate (RPM)	600 - 1000
溶剂箱 Solvent tank (L)	130
电源电压 Supply voltage (V)	380V - 50Hz
洗涤电机 Washing machine (kw)	1.1
液泵电机 Liquid pump motor (kw)	0.37
溶剂加入量 Solvent addition (L)	200
宽*深*高 Width * depth * height (mm)	840×940×1130
机器重量 Machine weight (kg)	450
Cubic meter (m³)	1



◆> 送布机系列

Feeding machine Series



产品特点 Product features

- ◎带孔式羊毛布传送带, 提高了布草在传送带上的吸附力, 使布草更加平整地吸附在传送带上。
- ◎送布调速可调节, 与熨平速度完美匹配, 引进国外技术, 带有毛刷功能比其他厂家的送布机展平效果好, 安全性高。
- ◎高效的吸风功能, 可使布草尾段完全抖开, 使用不同的布草需求。
- ◎人性化设计: 带有LED灯光照明, 当布草输送时, 方便观看查看布草是否有未清洗的污渍。
- ◎ The perforated wool cloth conveyor belt improves the adsorption force of the linen on the conveyor belt, so that the linen can be absorbed on the conveyor belt more smoothly;
- ◎ The cloth feeding speed can be adjusted, which perfectly matches the ironing speed, The introduction of foreign technology, with the brush function, has better flattening effect and higher safety than other manufacturers' cloth feeding machines.
- ◎ Efficient air suction function can completely shake the tail of the linen, and use different linen requirements.
- ◎ Humanized design with LED lighting, when the linen is conveyed, it is convenient to watch to see whether the linen has undecleaned stains.

产品参数 Product parameters

型号 Model number	SB-3300
电压 Voltage V/P/Hz	380/3/50
最大送布宽度 Max Feeding Width (mm)	3300
送布速度 Feeding Speed (m/min)	10 - 50
送布功率 Feeding Motor Power (Kw)	0.37
传动功率 Drive Motor Power (Kw)	0.75
风机功率 Fan Motor Power (Kw)	7.1
整机尺寸 Machine Dimension (L*W*H) (mm)	4450×1200×1550
整机重量 Machine Weight (Kg)	1200



熨平机系列

Flat work Ironer Series

01 全自动床单被套烫平机

Flat work Ironer



产品特点

Product features

- ◎ 辊筒均采用304不锈钢制成, 传送轴采用精拉钢管, 外套不锈钢管, 大大延长整机使用寿命。
- ◎ 熨平机二侧机架箱体采用高强度优质的钢板焊接而成, 从而使设备在高负荷运行时确保高效稳定运行。
- ◎ 采用变频控制, 可根据不同的布草进行速度的调节。
- ◎ 配有输送带的自动涨紧机构, 可根据能源的供给和织物的厚度等状况, 自动将输送带涨紧至最佳状态, 提高熨平质量。
- ◎ 送进布处装有安全挡板, 只要推动挡板, 设备将立即停止, 确保操作人员的安全。
- ◎ 组合式的箱体设计, 从而使机器可根据客户的要求进行辊筒数量的轻松升级。
- ◎ 大辊筒蒸汽端配有润滑油加注装置, 可保证主轴承的润滑, 配有安全急停开关。
- ◎ 关于熨平机我们可以生产单辊熨平机, 两辊熨平机, 三辊熨平机, 四辊烫熨平机, 五辊熨平机等。
- ◎ 熨平机加热方式有3种可以选其中一种: 电加热方式, 蒸汽加热, 燃气加热。

The roller is made of 304 stainless steel, the transmission shaft is made of fine drawn steel pipe and the outer stainless steel pipe, which greatly extends the service life of the whole machine.

The two-side frame of the ironing machine is welded with high-strength and high-quality steel plates, so that the equipment can ensure efficient and stable operation during high-load operation.

Using frequency conversion control, the speed can be adjusted according to different cloth.

With the automatic tightening mechanism of the conveyor belt, it can automatically tighten the conveyor belt to the best state according to the energy supply and the thickness of the fabric, and improve the ironing quality.

A safety baffle is installed at the feeding place. As long as the baffle is pushed, the equipment will stop immediately to ensure the safety of the operator.

Modular box design, so that the machine can easily upgrade the number of rolls according to customer requirements.

The steam end of the large roller is equipped with lubricating oil filling device, which can ensure the lubrication of the main bearing and is equipped with a safety emergency stop switch.

About ironing machine We can produce single roller ironing machine, two roller ironing machine, three roller ironing machine, four roller ironing machine, five roller ironing machine and so on

There are three heating methods of the ironing machine to choose one of them: electric heating, steam heating, gas heating.

产品参数

Product parameters

型号 Model number	YPAI-3000	YPAII-3000	YPAIII-3300	YPAIV-3300	YPAV-3300
电压 Voltage (v)	220/380/415	220/380/415	220/380/415	220/380/415	220/380/415
辊筒数量 Roll Numbers	1	2	3	4	5
辊筒直径 Roller Diameter (mm)	800	800	800	800	800
最大熨烫宽度 Max Ironing Width (mm)	3000	3000	3000	3300	3300
熨烫速度 Ironing Speed (m/min)	0-15	3 - 20	3 - 25	3 - 35	3 - 55
电机功率 Motor Power (kw)	0.75	1.5	2.2	3	4
变频器功率 Inverter Power (kw)	1.1	2.2	3.7	3.7	5.5
电加热功率 Electric Heating Power (kw)	36	72	108	144	/
蒸汽加热压力 Steam Heating Pressure (Mpa)	0.4 - 0.6	0.4 - 0.6	0.4 - 0.6	0.4 - 0.6	0.4 - 0.6
耗汽量 Steam Consumption (kg/h)	120	240	360	480	600
燃气压力 Gas Heating Pressure (Mpa)	0.05 - 0.2	0.05 - 0.2	0.05 - 0.2	0.05 - 0.2	0.05 - 0.2
燃气消耗量 Gas Consumption (m3/h)	6	12	18	24	30
进气管 Steam Inlet Pipe (mm)	DN40	DN40	DN40	DN40	DN40
进气管 Gas Inlet Pipe (mm)	DN40	DN40	DN40	DN40	DN40
机器外形尺寸 External dimension H*D*W (mm)	4150×1650×1360	4150×2650×1360	4150X3650X1360	4450×4650×1360	4450×5650×1360
机器体积 Machine volume (m³)	10	15	21	28	34
机器净重 Net weight of machine (kg)	1100	2100	3230	4300	5500



◆> 折叠机系列

Folding Machine Series



产品特点

Product features

- ◎采用先进的快速准确折叠智能控制系统，触摸屏自编程控制系统设计，每次折叠单独控制，多个自动控制选项，使机器运行速度和折叠精度达到峰值。

◎折叠速度可达60米/分。(虽然折叠率小于0.5%) 电气控制部分均采用进口元件，给机器运行速度、精度、稳定性提供有效保证。机折床单共5折、2折横折和3折竖折，根据布草的大小可选择2折、4折和5折。

◎所示。采用实心焊接结构，确保机器运行稳定，避免防震，延长机器使用寿命。

◎所示。性能稳定，运行速度高，每分钟可达60米，大大提高工作效率。可搭配任何品牌熨烫机，运行稳定。采用优质知名品牌配件，确保折叠准确。

◎SMC电磁阀，吹气时间精确到1ms，且状态稳定。
- ◎ Adopt advanced fast and accurate folding intelligent control system, touch screen self- programmed control system design, each fold separate control, a number of automatic control options, so that the machine running speed and folding accuracy reach the peak.

◎ The folding speed can reach 60 meters/min. (although the folding rate is less than 0.5%) the electrical control parts are imported components, to the machine running speed, accuracy, stability to provide an effective guarantee. Machine folding sheet total 5 fold, 2 cross fold and 3 vertical fold, according to the size of linen can choose 2 fold, 4 fold and 5 fold.

◎ Adopt solid welding structure to ensure the stable operation of the machine,avoidshaking,prolong the service life of the machine.

◎ Stable performance, high speed operation, can reach 60 meters per minute, greatly improve the work efficiency. Can match any brand ironing machine, stable operation. Used high quality well-known brand accessories, ensure accurate folding.

◎ SMC solenoid valve, blowing time accurate to 1 ms, and the state is stable.



产品参数

Product parameters

规格型号 Model & norm	ZD3300-V
最大折叠宽度 Maximum folded width (mm)	3300
最多折叠层次 Most folding levels	5/32
最大折叠速度 Biggest folding speed (m/min)	50
额定电压 Rated oltage (V / HZ)	380 / 50
电机功率 Motor power (KW)	1.87
进气管径 Inlet lowest pressure (mm)	Φ12
最低进气压力 Inlet lowest pressure (MPa)	0.7
耗气量 Steam consumption (m3 / min)	1.2
外形尺寸 Exterior dimension (mm)	4100×3100×1750
整机重量 Overall weight (kg)	1700



◆> 辅助设备系列

Auxiliary equipment Series

01 多功能洗鞋机

Multi functional shoe washer



◆> 辅助设备系列

Auxiliary equipment Series

02 烘鞋机

Multi functional shoe washer



产品参数 Product parameters		产品参数 Product parameters				
型号 Model number	XXJ-170	型号 Model number	HXJ-6	HXJ-10	HXJ-16	HXJ-32
功率 power (w)	170	烘干数量 Drying quantity	6 (pair)	10 (pair)	16 (pair)	32 (pair)
电压 Supply voltage (v)	220	功率 power (kw)	2.8	2.8	3.5	6
外形尺寸 machine size (mm)	1100*580*1200	电压 Supply voltage (v)	220	220	220	220
整机重量 Machine weight (kg)	60	外形尺寸 machine size (mm)	600*640*1000	600*640*1360	600*640*1810	1100*640*1810
功能支持 Functional support	升级毛刷 调速循环水 漏电保护器 无极调速电机 加厚不锈钢 带储物柜 高光LED射灯 Upgraded brush speed regulation circulating water leakage protector stepless speed regulation motor thickened stainless steel with locker highlight LED spotlights					
		整机重量 Machine weight (kg)	55	60	65	75
		功能支持 Functional support	热风循环 全不锈钢 紫外线臭氧消毒杀菌 Hot air circulation all stainless steel ultraviolet ozone sterilization			

辅助设备系列 Auxiliary equipment Series

03 旋转式烘鞋机
Rotary shoe dryer



产品参数 Product parameters

型号 Model number	XHXJ-20	XHXJ-25
烘干数量 Drying quantity	20(pair)	25(pair)
功率 power (kw)	5.5	6
电压 Supply voltage (v)	220	220
外形尺寸 machine size (mm)	860*900*1720	860*900*1920
整机重量 Machine weight (kg)	70	70
功能支持 Functional support	热风循环全不锈钢紫外线臭氧消毒杀菌 Hot air circulation all stainless steel ultraviolet ozone sterilization	

辅助设备系列 Auxiliary equipment Series

04 夹烫机
Clothes Clip Press



产品参数 Product parameters

型号 Model number	YT-30
工作台尺寸 Table size (mm)	305x229x1008
蒸汽压力 Steam pressure (Mpa)	0.4-0.5
耗汽量 Amount of steam consumed (kg/h)	20
机器重量 Machine weight (kg)	250
机器尺寸 Machine size (mm)	1200x1200x1300
整机体积 Machine volume cubic meter (m³)	2

05 自吸风烫台、发生器
Self suction hot air table and generator



产品参数 Product parameters

型号 Model number	ITN
工作台尺寸 Table size (mm)	1380x480
电源电压 Supply voltage (v)	220
电机功率 Motor Power (kw)	0.75
外包装尺寸 Outer package size (mm)	1638x580x1950
机器重量 Machine Weight (kg)	216
台面加热功率 Countertop heating power (kw)	0.4
加热器锅功率 Heater pot power (kw)	3

辅助设备系列 Auxiliary equipment Series

06 多功能烫台
Multifunctional Suction Ironing Table



产品参数 Product parameters

型号 Model number	YT-30
台面Table(mm)	1300×700
电压Voltage(v)	220
功率Power(w)	550
机器尺寸Machine Dimensions(mm)	1100×820×1350
机器重量 Machine Weight(kg)	70
Suction ironing table. Rocker arm, boiler, steam pipe, iron	

07 衣物包机
Clothing Packing Machine



产品参数 Product parameters

型号 Model number	YT-30
电源电压 Supply voltage (V/Hz)	220/50
功率 Power (kw)	0.2
机器尺寸 Machine Dimensions (mm)	1780x600x750
机器重量 Machine weight (kg)	40

辅助设备系列 Auxiliary equipment Series

08 衣物输送线
Clothing Line Classification



产品参数 Product parameters

型号 Model number	YW-308	YW-280
挂衣点数 Clothes-hanging point	308	280
机身尺寸 Frame size (mm)	1150×970×420	1150×970×420
机框架尺寸 Mechanical frame size (mm)	800×1770×130	800×1770×130
机器功率 Machine Power (w)	370	70
电源电压 Voltage (v)	220	220
整机重量 Machine weight (kg)	110	108

05 自吸风烫台、发生器
Self suction hot air table and generator



产品参数 Product parameters

配置 Configuration	四核+8G 内存+256G 固态硬盘 Four cores +8G memory +256 G solid state drive
屏幕 Screen	15.4 (可折叠 Foldable)
客人展示 Guest Display	8 位 LED 客显 8 - bit LED guest display
演讲者 Speaker	内置扬声器 Built - in speaker
打印机 Printer	58 毫米收货机 58 mm receipt machine
扫码端口 Code sweep port	内置代码扫描 Built - in code sweep

FACTORY WORKSHOP

工厂车间

